


Cryogenic valve sealing capability as per BS6364 standard

The leakage rate measured at the flowmeter shall not exceed $100 \text{ mm}^3/\text{s} \times \text{DN}$.

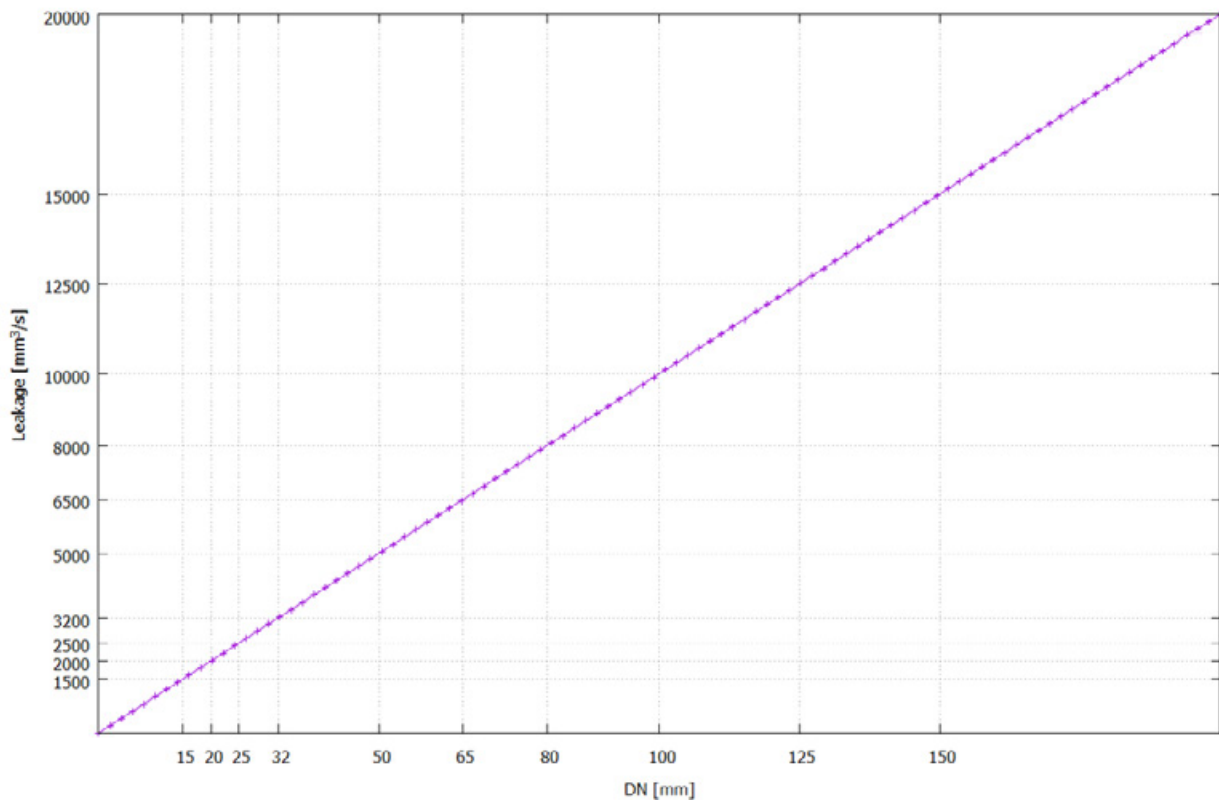

Cryogenic valve sealing capability as per EN12567 standard

- Class L₁ 0 < L_{max} ≤ 0.5 DN;
- Class L₂ 0.5 DN < L_{max} ≤ 1 DN;
- Class L₃ 1 DN < L_{max} ≤ 2 DN;
- Class L₂ 2 DN < L_{max} ≤ 4 DN.

Class L₃ is Habonim standard acceptance criteria for inline sealing capability in cryogenic service. Class L₂ and Class L₁ are also available upon special request.

